


## JD3快装法兰式精密过滤器

JD3 Quickly Flange Cartridge Filter Housing

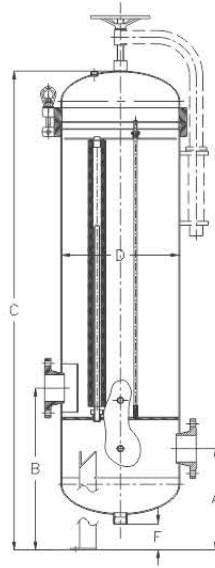

### 参数概述/General Specifications

- 1、材质SUS304, SUS316L;
- 2、最大工作压力150Psi;
- 3、带脚、带钢碗、快装法兰式;
- 4、滤芯整体压紧或三支一组单独压紧;
- 5、表面抛光处理或亚光处理;
- 6、可按ASME标准设计。

- 1、Material:SUS304,SUS316L;
- 2、Max working pressure 150Psi;
- 3、With legs, with SS cup, flange; Quickly flange type;
- 4、Whole Hold down or separate hold down by three;
- 5、Polished or sandblast external surface;
- 6、Can be designed according to ASME standard.

### 尺寸/Dimension

型号/Model	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	Inlet/Outlet	Drain
JD3-Φ350x15x40"	360	900	1665	Φ350	150	2" -3"	1/2"
JD3-Φ400x 18x40"	380	900	1690	Φ400	150	2" -3"	1/2"
JD3-Φ450x 24x40"	395	900	1715	Φ450	150	2" -4"	3/4"
JD3-Φ500x 30x40"	415	1000	1740	Φ500	180	2" -4"	3/4"
JD3-Φ550x 36x40"	430	1000	1765	Φ550	180	3" -5"	3/4"
JD3-Φ600x 45x40"	450	1100	1830	Φ600	180	3" -5"	3/4"
JD3-Φ650x 51x40"	465	1100	1855	Φ650	180	3" -5"	3/4"
JD3-Φ700x 60x40"	480	1200	1900	Φ700	180	3" -5"	1"
JD3-Φ750x 72x40"	500	1200	1925	Φ750	180	4" -6"	1"
JD3-Φ800x 81x40"	515	1250	1950	Φ800	200	4" -6"	1"
JD3-Φ850x 90x40"	555	1250	2025	Φ850	200	4" -6"	1"
JD3-Φ900x 99x40"	570	1250	2050	Φ900	200	4" -6"	1"