




## JD2普通法兰式精密过滤器

JD2 Common Flange Cartridge Filter Housing

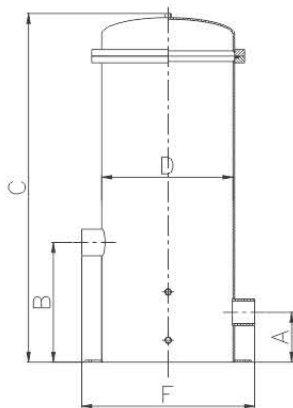

### 参数概述/General Specifications

- 1、材质SUS304, SUS316L;
- 2、最大工作压力150Psi;
- 3、平底、平压、普通法兰式; 或带钢碗插件;
- 4、表面抛光处理或亚光处理。

- 1、Material:SUS304,SUS316L;
- 2、Max working pressure 150Psi;
- 3、Common flange;or with SS cup and spring assembly;
- 4、Polished or sandblast external surface.

### 尺寸/Dimension

型号/Model	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	Inlet/Outlet	Drain
JD2-Φ170x3X10"	75	180	560	Φ170	310	1" ; -2"	1/4"
JD2-Φ170x3X20"	75	180	810	Φ170	310	1" ; -2"	1/4"
JD2-Φ170x3X30"	75	180	1060	Φ170	310	1" ; -2"	1/4"
JD2-Φ200x5X10"	75	180	590	Φ200	320	1" ; -2"	1/2"
JD2-Φ200x5X20"	75	180	840	Φ200	320	1" ; -2"	1/2"
JD2-Φ200x5X30"	75	180	1090	Φ200	320	1" ; -2"	1/2"
JD2-Φ200x5X40"	75	180	1340	Φ200	320	1 1/2" ; -2"	1/2"
JD2-Φ250x7X30"	120	220	1160	Φ250	390	1 1/2" ; -2"	1/2"
JD2-Φ250x7X40"	120	220	1410	Φ250	390	1 1/2" ; -2"	1/2"
JD2-Φ300x9X30"	150	600	1170	Φ300	440	2" ; -3"	1/2"
JD2-Φ300x9X40"	150	800	1420	Φ300	440	2" ; -3"	1/2"
JD2-Φ300x11X40"	150	800	1420	Φ300	440	2" ; -3"	1/2"
JD2-Φ350x15X40"	150	800	1430	Φ350	490	2" ; -3"	3/4"
JD2-Φ400x20X40"	150	800	1440	Φ400	560	2" ; -4"	3/4"
JD2-Φ450x27X40"	150	800	1450	Φ450	610	2" ; -4"	3/4"
JD2-Φ500x30X40"	150	800	1470	Φ500	660	2" ; -4"	1"
JD2-Φ550x36X40"	150	800	1490	Φ550	730	2 1/2" ; -2"	1"
JD2-Φ600x40X40"	150	900	1570	Φ600	760	2 1/2" ; -2"	1"
JD2-Φ650x50X40"	150	900	1580	Φ650	830	3" ; -4"	1"